


VSUN

Innovative & Smart

VSUN325-120M-BB The Half Cell Module

VSUN325-120M-BB
VSUN315-120M-BB

VSUN320-120M-BB
VSUN310-120M-BB

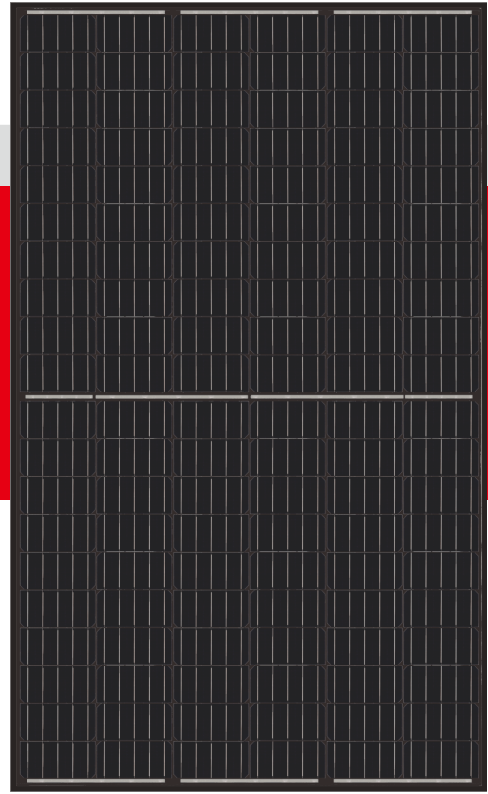

19.54%

Module efficiency

12years

Material & Workmanship warranty

325W

Highest power output

25years

Linear power output warranty



PERC Cell Technology



Higher output power



Lower risk of micro-crack



Positive tolerance offer



Lower risk of hot spot



Better shading tolerance




Certified for salt/ammonia corrosion resistance




Load certificates: wind to 2400Pa and snow to 5400Pa



Lower LCOE

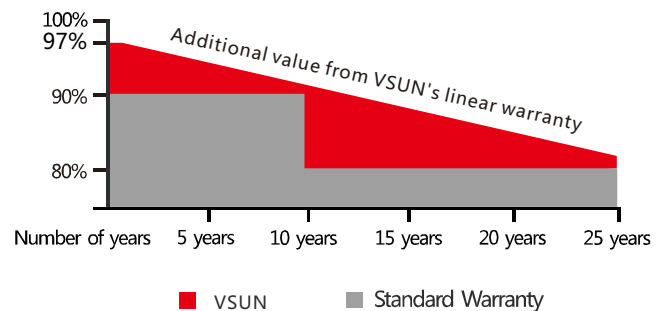

Munich RE  **®**
• 12-year product warranty
• 25-year linear power output warranty

Invested by Fuji Solar, VSUN is a Japanese solar module solutions provider located in Tokyo that offers Japanese quality solar technologies globally. The group's business covers Japan, North America, Southeast Asia and EMEA since 2006. Solar module manufacturing base is located in Vietnam, Bac Giang province, and it is one of the fastest-growing, most heavily invested and most promising solar high-tech enterprises in the country.

Innovative & Smart – VSUN has been committed to providing greener, cleaner, and more intelligent renewable energy solutions. It is focusing on the new energy market and the development of customized and high-efficiency products.

VSUN offers PV project development and investments and provides full package of service for EPC solutions.

Note:

All information and data are subject to change without notice.
All rights reserved@VSUN

A Sub-company of **FUJISOLAR**



Engineered in Japan
vsun@vietnamsunenergy.com
www.vsun-solar.com

Electrical Characteristics at Standard Test Conditions(STC)

Module Type	VSUN325-120M-BB	VSUN320-120M-BB	VSUN315-120M-BB	VSUN310-120M-BB
Maximum Power - Pmax (W)	325	320	315	310
Open Circuit Voltage - Voc (V)	40.4	40.2	39.9	39.6
Short Circuit Current - Isc (A)	10.28	10.17	10.08	9.98
Maximum Power Voltage - Vmpp (V)	33.5	33.3	33.1	32.8
Maximum Power Current - Imp (A)	9.71	9.61	9.52	9.46
Module Efficiency	19.54%	19.24%	18.94%	18.64%

Standard Test Conditions (STC): irradiance 1,000 W/m²; AM 1.5; module temperature 25°C. Pmax Sorting : 0~5W. Measuring Tolerance: ±3%.

Remark: Electrical data do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

Electrical Characteristics at Normal Operating Cell Temperature(NOCT)

Module Type	VSUN325-120M-BB	VSUN320-120M-BB	VSUN315-120M-BB	VSUN310-120M-BB
Maximum Power - Pmax (W)	240.2	236.3	234.7	228.4
Open Circuit Voltage - Voc (V)	37.4	37.2	36.9	36.6
Short Circuit Current - Isc (A)	8.3	8.22	8.15	8.07
Maximum Power Voltage - Vmpp (V)	30.8	30.6	30.6	30.2
Maximum Power Current - Imp (A)	7.8	7.72	7.67	7.5

Normal Operating Cell Temperature(NOCT) : irradiance 800W/m²; wind speed 1 m/s ; ambient temperature 20°C. Measuring Tolerance: ±3%.

Temperature Characteristics

NOCT	45°C (±2°C)
Voltage Temperature Coefficient	-0.29%/°C
Current Temperature Coefficient	+0.05%/°C
Power Temperature Coefficient	-0.39%/°C

Maximum Ratings

Maximum System Voltage [V]	1000
Series Fuse Rating [A]	20

Material Characteristics

Dimensions	1680×990×35mm (L×W×H)
Weight	18.7kg
Frame	Anodized aluminum profile
Front Glass	White toughened safety glass, 3.2 mm
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Sheet	Composite film
Cells	12×10 pieces monocrystalline solar cells series strings (156.75mm×78.375mm)
Junction Box	IP≥67, 3 diodes
Cable&Connector	Potrait: 500 mm (cable length can be customized) , 1×4 mm ² , compatible with MC4


Packaging

Dimensions(L×W×H)	1720×1110×1120mm
Container20'	360
Container40'	780
Container40'HC	845

System Design

Temperature Range	-40 °C to + 85 °C
Withstanding Hail	Maximum diameter of 25 mm with impact speed of 23 m/s-1
Maximum Surface Load	5,400 Pa
Application class	class A

Dimensions

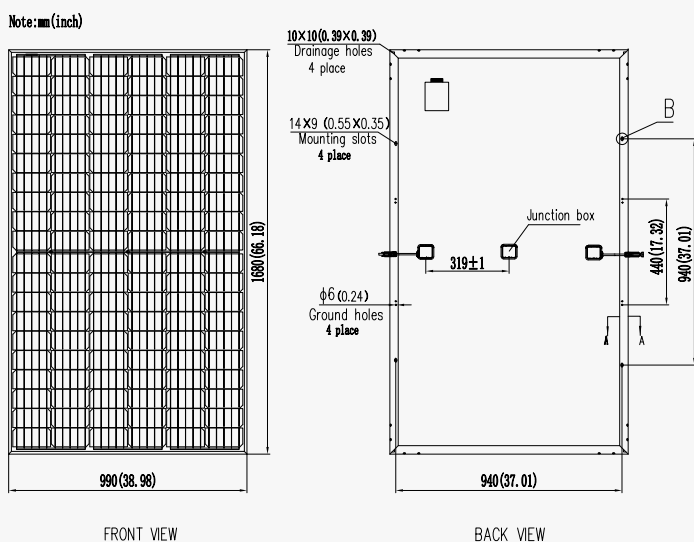

IV-Curves

